# Intuitive colour MFP for busy workgroups

The Lexmark XS748de colour laser MFP increases efficiency and delivers high-quality colour documents. Security controls and workflow-enhancing solutions make high-volume printing easy and secure.

















#### **Robust high-quality colour**

Pages

Rely on the Lexmark XS748de colour laser MFP for the high-quality colour printing, scanning and copying essential to business.

- Match corporate colours with Lexmark Named Color Replacement and PANTONE® calibration.
- Lexmark high-yield cartridges let you print up to 12,000 pages per cartridge in black and 10,000 pages per cartridge in colour.<sup>1</sup>
- Print and copy quickly at speeds up to 35 ppm and a time to first page as fast as 9 seconds in both black and colour.
- The high-speed processor, 512MB RAM and Gigabit Ethernet networking mean fast data transfer and fast processing, even on complex colour documents.
- Reliable paper feeding supports diverse media, including card stock, vinyl labels, banners and more.

### Performance and productivity

The combination of easy-to-use features and reliable performance means business processes are intuitive and you are productive.

- The easy-to-use 7-inch (17.8-cm) colour touch screen provides audible feedback and tablet-like navigation.
- Expand input capacity with optional paper drawers that boost total input capacity up to 4,300 sheets.
- Quickly print and copy documents using the instant warm-up fuser that also reduces energy consumption.
- Create custom messages to provide helpful information such as helpdesk telephone numbers and company communications.
- Instead of installing individual drivers for each printer model, the Lexmark Universal Print Driver provides a standardised, one-driver solution.


#### **Business solutions**

The Lexmark Embedded Solutions Framework (eSF) helps expand functionality, move information more efficiently, lower costs and analyse usage patterns.

- Quickly and efficiently access basic eSF solutions directly from the 7-inch (17.8-cm) colour touch screen.
- The optional hard disk provides the ability to store files on the device and run additional solutions with ease.
- Pre-loaded solutions mean you can be productive and save time, money and paper right out of the box.
- Additional solutions are available for greater savings and productivity.
- Models with solutions capabilities also have the card reader option for greater security.



## Lexmark XS748de Colour laser MFP Product specifications

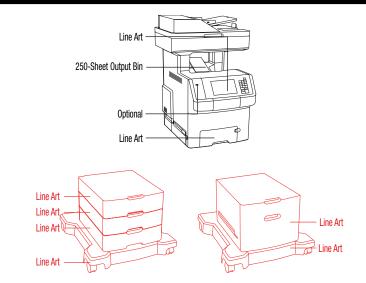



**Product specifications** 

#### Lexmark XS748de Colour laser MFP

Daplag         Lexmate + Tail Archalt (1/3 atm color back name)           Prict Speed: Up to         Black 38 ppm / Okonz 38 ppm           Time to Frid Page: As test as         PBIA 49 atm color 230 pdf, 4800 Color. 38 ppm           Prim Resultance, Color         1200 x 1200 ddf, 4800 Color. Color, 28 ppm           Prim Resultance, Color         1200 x 1200 ddf, 4800 Color. Color, 28 ppm           Prim Resultance, Color         2, Cler.           Minard Dik         Color. As ppm           Minard Dik         Color. As ppm           Minard Dik         Color. As ppm / Color. 38 cpm           Recommended Monthly DuY, Cycle: Up to*         Color. 33 cpm           Copy Speed: Up to         Black: 30 cpm / Color. 33 cpm           Copy Speed: Up to         Black. 30 cpm / Color. 33 cpm           Copy Speed: Up to         Black. 30 cpm / Color. 33 cpm           Copy Speed: Up to         Ad-Ltr, Black. 12 / 12 adds per minute - Ad-Ltr, Color. 12 / 12 adds per minute           Speed: Speed: Up to         Ad-Ltr, Black. 34 / 56 adds per minute - Ad-Ltr, Color. 33 cpm           Copy Speed: Up to         Ad-Ltr, Black. 34 / 56 adds per minute - Ad-Ltr, Color. 33 cdm           Standbard: Speed: Speed: Up to         Ad-Ltr, Black. 34 / 56 adds per minute - Ad-Ltr, Color. 33 cdm           Fastard         Speed: Speed	Printing	
Phint Speed: Up 10         Billack: 33 gpm / Callour, 33 gpm           Print Speed: Up 10         Billack: 33 gpm / Callour, 33 gpm           Print Speak/Back Statts         Callour 43 seconds           Print Speak/Back Statts         1200 x 1200 dpt, 4800 Color Duby (2400 x 600 dpt)           Processer Speed         120 x 1200 dpt, 4800 Color Duby (2400 x 600 dpt)           Processer Speed         Callour 33 gpm           Memory         Standard: 512 MB / Mowimum: 1536 MB           Print Speed: Up 10         Callour 30 gpm           Recommended Monthly Page Volume <sup>2</sup> Callour 30 gpm           Memory         Callour 30 gpm           Memory         Black: 13 seconds / Colour: 33 spm           There I Frist Cogr. As last as         Black: 13 seconds / Colour: 33 spm           Redue / Friange Fange         26 - 400%           Seconds		Levmark e-Task 7-inch (17.8 cm) color touch screen
There is Praip As fast as         Bilack 9 seconds           Prior Bacutano, Color         1200 x 1200 dpt. 800 Octo Quarky (200 x 600 dpt)           Processor Epoed         12 Octo           Processor Epoed         12 Octo           Memory         Octoor Quarky (200 x 600 dpt)           Hard Dek         Octoor Quarky (200 x 600 dpt)           Recommended Monthly Fage Volume*         Octoor Quarks           Becommended Monthly Fage Volume*         0000 10000 gages           Maximum Monthly Uby Cycle: Up to*         10000 tages per month           Copy Space(Up to         Black: 33 cpm / Colour: 33 cpm           Three to First Copy. As fast as         0000 10000 gages           Machan / Entitige Range         26 - 400 %           Standard Entitige Range         26 - 400 %           Standare Mating Standard         6 - 400 %      <		
Print Resolution, Color         1200 k 1200 (pl, 4300 Color Quality (2400 k 600 dp))           Processor Speed         1, 2 GHz           Warny         Standard: 512 MB / Maximum: 1598 MB           Part Resolution, Color         Option available           Recommended Monthly Page Volume*         3000 - 10000 pages per month           Copying         100000 pages per month           Copying         Test Speed (2004): 33 cgm / Colour: 33 cgm           There to First Copy: A fatat as         Black: 13 seconds / Colour: 13.5 seconds           Reduce / Enlarge Range         25 - 400%           Standard (2004): 40.00         A4/Ltr, Black: 12 / 12 sides per minute - A4/Ltr, Colour: 12 / 12 sides per minute           Scanner Type         A4/Ltr, Black: 21 / 12 sides per minute - A4/Ltr, Colour: 12 / 12 sides per minute           Scanner Type         Standard (2004): 6000 (2004): 6000 (2004): 6000 (2004)           Scanner Speed: Up to         A4/Ltr, Black: 21 / 12 sides per minute - A4/Ltr, Colour: 12 / 12 sides per minute           Scanner Speed: Scanner symbol         Standard (2004): 6000 (2005) per Scanner symbol           Scanner Speed: Up to         A4/Ltr, Black: 21 / 12 sides per minute - A4/Ltr, Colour: 12 / 12 sides per minute           Scanner Speed: Up to         A4/Ltr, Black: 21 / 12 sides per minute - A4/Ltr, Colour: 13 / 12 sides per minute           Scanner Speed         Test Standard (2004)         Standard (20	· · ·	
Prosess Speed Memory Me	3	
Memory         Standard: 512 MeJ Maximum: 1536 MB           Hard Diak         Option available           Recommended Monthly Page Volume'         00000 pages per month           Copying         100000 pages per month           Copying         0           Copy Standard: Standard: Standard Monthly Page Volume'         00000 pages per month           Copy Standard: Character Standard: Standard Monthly Page Volume'         00000 pages per month           Copy Standard: Character Standard: Standard Monthly Page Volume'         00000 pages per month           Copy Standard: Character Standard: Standard Monthly Page Volume'         000000000000000000000000000000000000		
Herd Disk         Option selability           Recommended Monthly Page Volume*         3000 - 100000 pages           Maximum Monthly Duty Cycle: Up to*         100000 pages           Copy Speed: Up to         Black: 33 cpm / Colour: 33 spm           Copy Speed: Up to         Black: 33 cpm / Colour: 33 spm           Time to First Copy: As fast as         Black: 13 seconds / Colour: 13.5 seconds           Rockor / Enlarge Range         26 - 400%           Scanning         Ad/Lit, Black: 24 / 12 sides per minute           Diplex Scan Speed: Up to         Ad/Lit, Black: 24 / 25 sides per minute           Simplex Can Speed: Up to         Ad/Lit, Black: 34 / 35 sides per minute           Scanning Resolution         000 X 600 ppl           Faxing         33.6 Kdps           Tar. Transmission Speed         33.6 Kdps           Supplies         33.6 Kdps           Supplies         12.000°-page Black High Yield Tomer Carridges, 000°-page Black Starter Return Program Tomer Carridges           Paper Handling         550-Sheet Input Tray, 250-Sheet Output Ein Integrated Duplex, 100-Sheet Multipurpose Feeder           Paper Handling Standard         550-Sheet Input Tray, 250-Sheet Output Ein, Integrated Duplex, 100-Sheet Multipurpose Feeder           Paper Handling Standard         550-Sheet Input Tray, 250-Sheet Dupt Ein Integrated Duplex, 100-Sheet Multipurpose Feeder           Paper		
Becommended Monthly Page Volume <sup>1</sup> 3000 - 10000 pages per month           Copying         100000 pages per month           Copy Spect: Up to         Black: 33 cpm / Colour: 33 cpm           There for RC Copy: As fast as         Black: 12 / 12 sides per minute - A4/Ltr, Colour: 12 / 12 sides per minute           Darks Scan Spect: Up to         A4/Ltr, Black: 12 / 12 sides per minute - A4/Ltr, Colour: 33 / 55 sides per minute           Searmer Type         A4/Ltr, Black: 13 / 55 sides per minute - A4/Ltr, Colour: 33 / 55 sides per minute           Searmer Type         A4/Ltr, Black: 13 / 12 sides per minute - A4/Ltr, Colour: 33 / 55 sides per minute           Searmer Type         A4/Ltr, Black: 34 / 35 sides per minute - A4/Ltr, Colour: 33 / 55 sides per minute           Searmer Type         Got X 600 ppl           Fax Transmission Speed: Up to         3.8 (Apps           Stopples         3.3 6 Kbps           Supplies Yhald         12.000/-page Black High Yhald Toner Cartridges (DMY)           Cartridge/65 Shipping with Product         6.0001-page Cour (DMY) Starter Fau/Lum Program Toner Cartridges for Page           Supplies Yhald         12.0001-page Cour (DMY) Starter Fau/Lum Program Toner Cartridges for Page           Paper Handling Optional         S50-Sheet Input Tiny, 200-Sheet Multipurpose Feeder           Paper Handling Optional         S50-Sheet Input Tiny, 200-Sheet Multipurpose Feeder           Paper Handling Optional <td></td> <td></td>		
Maximum Monthly Duty Cycle: Up to?         100000 pages per month           Copy Speed: Up to         Black: 33 opm / Colour: 33 spem           Copy Speed: Up to         Black: 33 opm / Colour: 33 spem           Time to Fisit Copy: As fast as         Black: 13 seconds           Reduce / Entrage Range         25 - 400%           Searning         AALtr, Black: 12 / 12 sides per minute - AALtr, Colour: 33 / 35 sides per minute           Simplex Scan Speed: Up to         AALtr, Black: 4/ / 35 sides per minute - AALtr, Colour: 33 / 35 sides per minute           Scanning Resolution         Black: 33 opm / Colour: 33 / 35 sides per minute           Scanner Type         GOX KOO ppl           Modem Speed: Up to         AALtr, Black: 4/ / 35 sides per minute           Scanner Type         Black Black           Optical Scanning Resolution         GOX KOO ppl           Fax Transmission Speed         - 33 to Kops           Supplies         - 33 to Kops           Supplies Vial         12,000'-page Black High Yiekl Toner Cartridges, 6,000'-page Black Starter Return Program Toner Cartridges, 6,000'-page Black Starter Return Program Toner Cartridges, 6,000'-page Black Starter Return Program Toner Cartridges           Paper Handling         Standard: 250 speed Input Tany, 250-sheed Dutput Bin. Integrated Dutput No. Sheet High Capacity Feder           Paper Induct Opacity: Up to         Standard: 250 pages 20 to r 75 gem bond / Maaimum: 4300 pages 2		
Copying         Number of Field Speed: Up to         Black: 33 cpm / Colour: 13.5 seconds           Reduce / Enlarge Range         25 - 400%         25 - 400%           Scanning         26 - 400%         28 - 400%           Dapker Scan Speed: Up to         A4Ltr, Black: 12 / 12 sides per minute - A4/LTr, Colour: 13.5 seconds         26 - 400%           Samer Type         Flatbed scanner with ADF         Flatbed scanner with ADF           Scanner Type         State scanner with ADF         Flatbed scanner with ADF           Optical Scanning Resolution         600 X 600 ppi         600 X 600 ppi           Scanner Type         State scanner with ADF         State scanner with ADF           Optical Scanning Resolution         600 X 600 ppi         600 X 600 ppi           Scanner Type         State scanner With ADF         State scanner With ADF           Stapples         33.6 Kbps         Carridges (Stapple)         Carridges (Stapple)           Stapples Valid         12.0000-page Black High Yleid Toner Carridges (CMM)         Carridges (Stapple)           Stapples Valid         12.0000-page Black High Yleid Toner Carridges (CMM)         Startinges Stale State Return Program Toner Carridges (CMM)           Paper Handling Optional         StoShest Special Wideh State State Return Program Toner Carridges (CMM)         State Return Program Toner Carridges (CMM)           Paper Handl	, , ,	
Corry Speed: Up to         Black: 33 cpm         Colour: 33 cpm           Time to First Copy: As fast as         Black: 13 seconds / Colour: 13.5 seconds           Reduce / Enlarge Range         2.5 - 4.00%           Searning         -           Duplex Scan Speed: Up to         Ad/Lr, Black: 12 / 12 aldes per minute - Ad/Lr, Colour: 33 / 35 aldes per minute           Scanner Type         Colour Start / 12 aldes per minute - Ad/Lr, Colour: 33 / 35 aldes per minute           Scanner Type         Ad/Lr, Black: 12 / 12 aldes per minute - Ad/Lr, Colour: 33 / 35 aldes per minute           Scanner Type         Returner with ADF           Optical Scanning Resolution         600 X 000 ppl           Faxing         3.6 Kbps           Scanner Type         3.8 Kbps           Supplies Yeald         1.2,000 - page Black High Yeald Toner Cartridges (CMY)           Cartridges (Stipping with Product         6,000'- page Colour (CMY) Starter Return Program Toner Cartridges (CMY)           Cartridges (Stipping with Product         500-Sheet Input Tray, 250-Sheet Draver, 2,000-Sheet High Capacity Feeder           Paper Handling         Fast Transmission Speed         Seconder 2, 50-Sheet Draver, 2,000-Sheet High Capacity Feeder           Paper Handling Optional         S50-Sheet Specially Media Draver, 550-Sheet Draver, 2,000-Sheet High Capacity Feeder           Paper Handling Optional         Stort As Label Cuide, Viny Labels, Tarsp	, , , ,	100000 pages per month
Time to First Copy: As fast as         Black: 13 seconds / Colour: 13.5 seconds           Reduce / Enlarge Range         25 - 400%           Scanning         25 - 400%           Duplex Scan Speed: Up to         ArULr, Black: 12 / 12 sides per minute - ArULr, Colour: 12 / 12 sides per minute           Simplex Scan Speed: Up to         ArULR, Black: 12 / 12 sides per minute - ArULr, Colour: 12 / 12 sides per minute           Stanner Type         ArULR, Black: 12 / 12 sides per minute - ArULr, Colour: 33 / 35 sides per minute           Scanner Type         Ratbed scanner with ADF           Optical Scanning Resolution         6000 × 600 ppi           Faxing         3.6 Kdps           Fax Transmission Speed         -3 seconds per page           Supples         -3 seconds per page           Supples Viel         12.000 <sup>1</sup> -page Black High Yeld Toner Cartridges, f.000 <sup>1</sup> -page Black Stater Return Program Toner Cartridges           Paper Handling Shipping with Product         6.000 <sup>1</sup> -page Colour (GMY) Stater Return Program Toner Cartridges, f.000 <sup>1</sup> -page Black Stater Return Program Toner Cartridges           Paper Handling Standard         550-Sheet Input Tay, 250-Sheet Input Tay, 250-Sheet Input Tay, 250-Sheet Input Tay, 250-Sheet Input Stater Return Program Toner Cartridges           Paper Handling Optional         S50-Sheet Specialty Media Drawer, 500-Sheet Input Tay, 250-Sheet Input Tay, 250-Sheet Input Stater Return Program Toner Cartridges, 6,000 <sup>1</sup> -page 20 to r 75 gem bond		
Reduce / Enlarge Range         25 - 400%           Scanning         20           Duplex Scan Speed: Up to         ArVLtr, Black: 12 / 12 sides per minute - ArVLtr, Colour: 32 / 35 sides per minute           Stanner Type         AVLtr, Black: 34 / 35 sides per minute - ArVLtr, Colour: 33 / 35 sides per minute           Scanner Type         Ratbed scanner with ADF           Optical Scanning Resolution         6000 × 600 ppl           Faxing         33.6 Kbps           Modern Speed         33.6 Kbps           Faxing         33.6 Kbps           Supplies Yield         12,000°-page Black High Yield Toner Cartridges. (DMY)           Cartridge(s) Shipping with Product         6,000°-page Black High Yield Toner Cartridges. (DMY)           Cartridge(s) Shipping with Product         6,000°-page Colour (CMY) Starter Return Program Toner Cartridges. (DMY)           Paper Handling         550-Sheet Input Tray, 250-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder           Paper Handling Optional         550-Sheet Input Tray, 250-Sheet Drawer, 2,000-Sheet High Capacity Feeder           Paper Handling Optional         550-Sheet Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder           Paper Handling Optional         550-Sheet Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder           Paper Handling Optional         Standard: 250 pages 20 lb or 75 gam bond           Paper Input Capac		
Scanning         Ad/Ltr, Black: 12 / 12 sides per minute - Ad/Ltr, Colour: 12 / 12 sides per minute           Duplex Scan Speed: Up to         Ad/Ltr, Black: 12 / 12 sides per minute - Ad/Ltr, Colour: 13 / 35 sides per minute           Simplex Scan Speed: Up to         Patbed scanner Type           Patbed scanner Type         Platbed scanner with ADF           Optical Scanning Resolution         600 X 600 ppl           Faxing         33.6 Kbps           Modern Speed         33.6 Kbps           Fax Transmission Speed         < 3 seconds per page		
Duplex Scan Speed: Up to         A4/Ltr, Black: 12 / 12 sides per minute - A4/Ltr, Colour: 12 / 12 sides per minute           Samper Speed: Up to         A4/Ltr, Black: 34 / 38 sides per minute - A4/Ltr, Colour: 33 / 35 sides per minute           Scanner Type         Flattbed scanner with ADF           Optical Scanning Resolution         600 X 600 ppl           Faxtman         600 X 600 ppl           Faxtman         33.6 Kbps           Faxtmannission Speed         -           Supplies         33.6 Kbps           Supplies Yield         12,000°-page Black High Yield Toner Cartridge, 10,000°-page Color High Yield Toner Cartridges (CMY)           Cartridge(s) Shipping with Product         6,000°-page Colour (CMY) Stater Return Program Toner Cartridges, 6,000°-page Black Starter Return Program Toner Cartridge           Paper Handling         560-Sheet Input Tiray, 250-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder           Paper Handling Optional         550-Sheet Input Tiray, 250-Sheet Tonur, 300-Sheet High Capachy Feeder           Paper Input Capacity: Up to         Standard: 650 pages 20 to r 75 gam bond           Paper Output Capacity: Up to         Standard: 650 pages 20 to r 75 gam bond           Media Sizes Supported         Refer to the Card Stock & Label Guide, Winy Labels, Tarsparencies, Card Stock, Paper Labels, Envelope, A5, A4, 9 Envelope, A5, A4, 9 Envelope, 33/4 Envelope, Oficio           Cantridge Arridge Arridge Arridge Arridge Arridge Arrid		25 - 400%
Simplex Scan Speed: Up to         A4/Ltr, Black: 34 / 35 sides per minute - A4/Ltr, Colour: 33 / 35 sides per minute           Scanner Type         Flatted scanner with ADF           Optical Scaning Resolution         600 × 600 ppi           Faxing         33.6 Kbps           Fax Transmission Speed         -3.3 seconds per page           Supplies         -3.3 seconds per page           Supplies Yield         6,000 'page Black High Yield Toner Cartridge, 6,000' page Color High Yield Toner Cartridges (DMY)           Cartridge(5) Shoping with Product         6,000' page Color (IGMY) Statter Return Program Toner Cartridges, 6,000' page Elack Statter Return Program Toner Cartridges           Paper Handling		
Scanner Type         Flatbed scanner with ADF           Optical Scanning Resolution         600 X 600 ppi           Faxing         600 X 600 ppi           Faxing         33.6 Kbps           Modem Speed         33.6 Kbps           Supplies         33.6 Kbps           Supplies Yield         12,000°-page Black High Yield Toner Cartridge, 10,000°-page Color High Yield Toner Cartridges (CMY)           Cartridge(s) Shipping with Product         6,000°-page Colour (CMY) Starter Return Program Toner Cartridges, 6,000°-page Black Starter Return Program Toner Cartridges           Paper Handling         550-Sheet Input Tray, 250-Sheet Output Ein, Integrated Duplex, 100-Sheet Multipurpose Feeder           Paper Handling Qibtinal         550-Sheet Specially Media Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder           Paper Handling Quotinal         550-Sheet Specially Media Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder           Paper Handling Quotinal         550-Sheet Specially Media Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Eeder           Paper Uptury Capacity: Up to         Standard: 650 pages 201 bo 75 gsm bond / Maximum: 4300 pages 201 bo 75 gsm bond           Paper Uptury Capacity: Up to         Standard: 550 pages 201 bo 75 gsm bond / Maximum: 4300 pages 201 bo 75 gsm bond           Media Types Supported         Refer to the Card Stock & Label Guide, Vnyl Labels, Transparencies, Card Stock, Paper Labels, Envelopes, Afa, 9 Envelope, Gio	<u> </u>	
Optical Scanning Resolution         600 X 600 ppi           Faxing		A4/Ltr, Black: 34 / 35 sides per minute - A4/Ltr, Colour: 33 / 35 sides per minute
Faxing       33.6 Kbps         Modem Speed       33.6 Kbps         Fax Transmission Speed       < 3 seconds per page	Scanner Type	Flatbed scanner with ADF
Modem Speed         33.6 Kbps           Fax Transmission Speed         < 3 seconds per page	Optical Scanning Resolution	600 X 600 ppi
Fax Transmission Speed       < 3 seconds per page	Faxing	
Supplies         Supplies Yield         12,000'-page Black High Yield Toner Cartridge, 10,000'-page Color High Yield Toner Cartridges (CMY)           Cartridge(s) Shipping with Product         6,000'-page Colour (CMY) Starter Return Program Toner Cartridges, 6,000'-page Black Starter Return Program Toner Cartridges           Paper Handling Standard         550-Sheet Input Tray, 250-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder           Paper Handling Optional         550-Sheet Specialty Media Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder           Paper Input Capacity: Up to         Standard: 650 pages 20 Ib or 75 gsm bond / Maximum: 4300 pages 20 Ib or 75 gsm bond           Paper Output Capacity: Up to         Standard: 650 pages 20 Ib or 75 gsm bond / Maximum: 4300 pages 20 Ib or 75 gsm bond           Media Types Supported         Refer to the Card Stock & Label Guide, Viryl Labels, Transparencies, Card Stock, Paper Labels, Envelopes, Plain Paper           Media Sizes Supported         A6, 10 Envelope, Universal, Statement, Letter, Legal, JIS-B5, Folio, Executive, B5, DL Envelope, C5 Envelope, B5 Envelope, A5, A4, 9 Envelope, 3/4 Envelope, Oficio           Centeral         Ethernet 10/100/1000 BaseTX (RJ-45), Rear USE 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), USB 2.0 Specification Hi-Speed Certified port (Type A), Cross 2.0 Specification Hi-Speed Certified Port	Modem Speed	33.6 Kbps
Supplies Yield         12,000'-page Black High Yield Toner Cartridge, 10,000'-page Color High Yield Toner Cartridges (CMY)           Cartridge(s) Shipping with Product         6,000'-page Colour (CMY) Starter Return Program Toner Cartridges, 6,000'-page Black Starter Return Program Toner Cartridge           Paper Handling         550-Sheet Input Tray, 250-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder           Paper Handling Optional         550-Sheet Specialty Media Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder           Paper Handling Optional         Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4300 pages 20 lb or 75 gsm bond           Paper Lopacity: Up to         Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 250 pages 20 lb or 75 gsm bond           Media Types Supported         Refer to the Card Stock & Label Guide, Viny Labels, Transparencies, Card Stock, Paper Labels, Envelopes, Plain Paper           Media Sizes Supported         Refer to the Card Stock & Label Guide, Viny Labels, Transparencies, Card Stock, Paper Labels, Envelope, A5, A4, 9 Envelope, Universal, Statement, Letter, Legal, JIS-B5, Folio, Executive, B5, DL Envelope, C5 Envelope, B5 Envelope, A5, A4, 9 Envelope, 3/4 Envelope, Oficio           General         Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified (Type B)           Optional Network Ports         Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified (Type B)           Optional Local Ports         Internal MarkNet <sup>TM</sup> N8250 802.11b/g/n Wire	Fax Transmission Speed	< 3 seconds per page
Cartidge(s) Shipping with Product       6,000¹-page Colour (CMY) Starter Return Program Toner Cartridges, 6,000¹-page Black Starter Return Program Toner Cartridge         Paper Handling       End (CMY)       End (CMY)       Starter Return Program Toner Cartridges, 6,000¹-page Black Starter Return Program Toner Cartridge         Paper Handling Standard       550-Sheet Input Tray, 250-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder         Paper Handling Optional       550-Sheet Specialty Media Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder         Paper Input Capacity: Up to       Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4300 pages 20 lb or 75 gsm bond         Media Types Supported       Refer to the Card Stock & Label Guide, Vinyl Labels, Transparencies, Card Stock, Paper Labels, Envelopes, A5, A4, 9 Envelope, A6, 10 Envelope, Universal, Statement, Letter, Legal, JIS-B5, Folio, Executive, B5, DL Envelope, C5 Envelope, A5, A4, 9 Envelope, 3/4 Envelope, Oficio         General       Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified (Type B)         Optional Network Ports       Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Gigabit Ethernet         Optional Local Ports       Internal Stardard Paralle, Internal Rar-8232C serial         Noise Level, Operating       Print: 57 dBA / Copy: 58 dBA / Scan: 54 dBA         ENERGY STAR       Yes         Specified Operating Environment       Humidity: 8 to 80% Relative Humidity, Temp	Supplies	
Paper Handling           Paper Handling           Paper Handling Standard         550-Sheet Input Tray, 250-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder           Paper Handling Optional         550-Sheet Specialty Media Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder           Paper Input Capacity: Up to         Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4300 pages 20 lb or 75 gsm bond           Paper Output Capacity: Up to         Standard: 250 pages 20 lb or 75 gsm bond / Maximum: 250 pages 20 lb or 75 gsm bond           Media Types Supported         Refer to the Card Stock & Label Guide, Vinyl Labels, Transparencies, Card Stock, Paper Labels, Envelopes, Plain Paper           Media Sizes Supported         A6, 10 Envelope, Universal, Statement, Letter, Legal, JIS-B5, Folic, Executive, B5, DL Envelope, C5 Envelope, A5, A4, 9 Envelope, 3/4 Envelope, Oficio           General         Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Casa 2.0 Specification Hi-Speed Ce	Supplies Yield	12,0001-page Black High Yield Toner Cartridge, 10,0001-page Color High Yield Toner Cartridges (CMY)
Paper Handling Standard       550-Sheet Input Tray, 250-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder         Paper Handling Optional       550-Sheet Specialty Media Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder         Paper Input Capacity: Up to       Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4300 pages 20 lb or 75 gsm bond         Paper Output Capacity: Up to       Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 250 pages 20 lb or 75 gsm bond         Media Types Supported       Refer to the Card Stock & Label Guide, Vinyl Labels, Transparencies, Card Stock, Paper Labels, Envelopes, Plain Paper         Media Sizes Supported       A6, 10 Envelope, Universal, Statement, Letter, Legal, JIS-B5, Folio, Executive, B5, DL Envelope, B5 Envelope, B5 Envelope, A5, A4, 9 Envelope, 3/4 Envelope, Oficio         Ceneral       Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type B)         Optional Network Ports       Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified port (Type B)         Optional Local Ports       Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Gigabit Ethernet         Noise Level, Operating       Internal 1284-B Bidirectional Parallel, Internal RS-232C serial         Noise Level, Operating       Yes         Specified Operating Environment       Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Atitude: 0 - 3048 Meters (10,000 Feet) </td <td>Cartridge(s) Shipping with Product</td> <td>6,0001-page Colour (CMY) Starter Return Program Toner Cartridges, 6,0001-page Black Starter Return Program Toner Cartridge</td>	Cartridge(s) Shipping with Product	6,0001-page Colour (CMY) Starter Return Program Toner Cartridges, 6,0001-page Black Starter Return Program Toner Cartridge
Paper Handling Optional       550-Sheet Specialty Media Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder         Paper Input Capacity: Up to       Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4300 pages 20 lb or 75 gsm bond         Paper Output Capacity: Up to       Standard: 250 pages 20 lb or 75 gsm bond / Maximum: 250 pages 20 lb or 75 gsm bond         Media Types Supported       Refer to the Card Stock & Label Guide, Vinyl Labels, Transparencies, Card Stock, Paper Labels, Envelope, Plain Paper         Media Sizes Supported       A6, 10 Envelope, Universal, Statement, Letter, Legal, JIS-B5, Folio, Executive, B5, DL Envelope, B5 Envelope, A5, A4, 9 Envelope, 3/4 Envelope, Oficio         Ceneral       Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified (Type B)         Optional Network Ports       Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Gigabit Ethernet         Optional Local Ports       Internal 1284-B Bidirectional Parallel, Internal Rs-232C serial         Noise Level, Operating       Yes         ENERGY STAR       Yes         Specified Operating Environment       Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Altitude: 0 - 3048 Meters (10,000 Feet)	Paper Handling	
Paper Input Capacity: Up to       Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4300 pages 20 lb or 75 gsm bond         Paper Output Capacity: Up to       Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 250 pages 20 lb or 75 gsm bond         Media Types Supported       Refer to the Card Stock & Label Guide, Vinyl Labels, Transparencies, Card Stock, Paper Labels, Envelopes, Plain Paper         Media Sizes Supported       A6, 10 Envelope, Universal, Statement, Letter, Legal, JIS-B5, Folio, Executive, B5, DL Envelope, G5 Envelope, A5, A4, 9 Envelope, 3/4 Envelope, Oficio         General       Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified (Type B)         Optional Network Ports       Ethernet 10/100/1000 BaseTX (RJ-45), Rear USE 0.0 Specification Hi-Speed Certified (Type B)         Optional Local Ports       Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Gigabit Ethernet         Noise Level, Operating       Print: 57 dBA / Copy: 58 dBA / Scan: 54 dBA         ENERGY STAR       Yes         Specified Operating Environment       Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Atitude: 0 - 3048 Meters (10,000 Feet)	Paper Handling Standard	550-Sheet Input Tray, 250-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder
Paper Output Capacity: Up to       Standard: 250 pages 20 lb or 75 gsm bond / Maximum: 250 pages 20 lb or 75 gsm bond         Media Types Supported       Refer to the Card Stock & Label Guide, Vinyl Labels, Transparencies, Card Stock, Paper Labels, Envelopes, Plain Paper         Media Sizes Supported       A6, 10 Envelope, Universal, Statement, Letter, Legal, JIS-B5, Folio, Executive, B5, DL Envelope, C5 Envelope, B5 Envelope, A5, A4, 9 Envelope, 3/4 Envelope, Oficio         General       Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified (Type B)         Optional Network Ports       Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified (Type B)         Optional Local Ports       Internal MarkNet™ M8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Gigabit Ethernet         Noise Level, Operating       Print: 57 dBA / Copy: 58 dBA / Scan: 54 dBA         ENERGY STAR       Yes         Specified Operating Environment       Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Attitude: 0 - 3048 Meters (10,000 Feet)	Paper Handling Optional	550-Sheet Specialty Media Drawer, 550-Sheet Drawer, 2,000-Sheet High Capacity Feeder
Media Types Supported       Refer to the Card Stock & Label Guide, Vinyl Labels, Transparencies, Card Stock, Paper Labels, Envelopes, Plain Paper         Media Sizes Supported       A6, 10 Envelope, Universal, Statement, Letter, Legal, JIS-B5, Folio, Executive, B5, DL Envelope, C5 Envelope, B5 Envelope, A5, A4, 9 Envelope, 3/4 Envelope, Oficio         General       Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified (Type B)         Optional Network Ports       Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified (Type B)         Optional Local Ports       Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Gigabit Ethernet         Optional Local Ports       Internal 1284-B Biclinectional Parallel, Internal RS-232C serial         Noise Level, Operating       Yes         ENERGY STAR       Yes         Specified Operating Environment       Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Atitude: 0 - 3048 Meters (10,000 Feet)	Paper Input Capacity: Up to	Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4300 pages 20 lb or 75 gsm bond
Media Sizes Supported       A6, 10 Envelope, Universal, Statement, Letter, Legal, JIS-B5, Folio, Executive, B5, DL Envelope, C5 Envelope, A5, A4, 9 Envelope, A5, A4, A4, A4, A4, A4, A4, A4, A4, A4, A4	Paper Output Capacity: Up to	Standard: 250 pages 20 lb or 75 gsm bond / Maximum: 250 pages 20 lb or 75 gsm bond
Ceneral       Standard Ports     Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified (Type B)       Optional Network Ports     Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified (Type B)       Optional Network Ports     Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Gigabit Ethernet       Optional Local Ports     Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Gigabit Ethernet       Noise Level, Operating     Internal 1284-B Bidirectional Parallel, Internal RS-232C serial       Noise Level, Operating     Yes       Specified Operating Environment     Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Altitude: 0 - 3048 Meters (10,000 Feet)	Media Types Supported	Refer to the Card Stock & Label Guide, Vinyl Labels, Transparencies, Card Stock, Paper Labels, Envelopes, Plain Paper
Standard Ports       Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type B)         Optional Network Ports       Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Gigabit Ethernet         Optional Local Ports       Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Gigabit Ethernet         Noise Level, Operating       Internal 1284-B Bidirectional Parallel, Internal RS-232C serial         Neise Level, Operating       Print: 57 dBA / Copy: 58 dBA / Scan: 54 dBA         ENERGY STAR       Yes         Specified Operating Environment       Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Altitude: 0 - 3048 Meters (10,000 Feet)	Media Sizes Supported	A6, 10 Envelope, Universal, Statement, Letter, Legal, JIS-B5, Folio, Executive, B5, DL Envelope, C5 Envelope, B5 Envelope, A5, A4, 9 Envelope, 3/4 Envelope, Oficio
Certified port (Type A), USB 2.0 Specification Hi-Speed Certified (Type B)           Optional Network Ports         Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Gigabit Ethernet           Optional Local Ports         Internal 1284-B Bidirectional Parallel, Internal RS-232C serial           Noise Level, Operating         Print: 57 dBA / Copy: 58 dBA / Scan: 54 dBA           ENERGY STAR         Yes           Specified Operating Environment         Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Altitude: 0 - 3048 Meters (10,000 Feet)	General	
Optional Local Ports         Internal 1284-B Bidirectional Parallel, Internal RS-232C serial           Noise Level, Operating         Print: 57 dBA / Copy: 58 dBA / Scan: 54 dBA           ENERGY STAR         Yes           Specified Operating Environment         Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Altitude: 0 - 3048 Meters (10,000 Feet)	Standard Ports	
Optional Local Ports         Internal 1284-B Bidirectional Parallel, Internal RS-232C serial           Noise Level, Operating         Print: 57 dBA / Copy: 58 dBA / Scan: 54 dBA           ENERGY STAR         Yes           Specified Operating Environment         Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Altitude: 0 - 3048 Meters (10,000 Feet)	Optional Network Ports	Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8120 Giαabit Ethernet
Noise Level, Operating         Print: 57 dBA / Copy: 58 dBA / Scan: 54 dBA           ENERGY STAR         Yes           Specified Operating Environment         Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Altitude: 0 - 3048 Meters (10,000 Feet)	•	
ENERGY STAR         Yes           Specified Operating Environment         Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Attitude: 0 - 3048 Meters (10,000 Feet)	•	
Specified Operating Environment Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F), Altitude: 0 - 3048 Meters (10,000 Feet)		
	Size (mm $H \times W \times D$ ) / Weight (kg)	787 x 546 x 622 mm / 4.2 kg

<sup>1</sup> Based on approximately 5% print coverage. Actual yields may vary based on factors such as page coverage, image type, job size, print/copy/fax modes, and duplexing.
<sup>2</sup> "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.
<sup>3</sup> "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.



Lexmark and Lexmark with the diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. PANTONE® is a registered trademark of Pantone, Inc. Information in this document is subject to change without notice. ENERGY STAR® is a U.S. registered mark. All other trademarks are the property of their respective owners. Google Docs and Google Cloud Print are trademarks of Google Inc.

